

# Diaphragm pressure gauge for the process industry

## Up to 10-fold overload safety, max. 40 bar

### Models 432.30, 433.30, 432.50 and 433.50

WIKA data sheet PM 04.03



For further approvals,  
see page 7

### Applications

- For measuring locations with increased overload
- With liquid-filled case suitability for high dynamic pressure loads and vibrations (models 433.50, 433.30)
- For gaseous, liquid and aggressive media, also in aggressive environments
- With open connecting flange also suitable for contaminated and viscous media
- Process industry: Chemical industry, petrochemical industry, oil and gas, power generation, water and wastewater technology, machine building and general plant construction

### Special features

- Case and wetted parts from stainless steel
- Wide choice of special materials
- Process connection thread or open flange
- Scale ranges from 0 ... 16 mbar
- QR code on dial links to instrument-specific information

### Description

Diaphragm pressure gauges are preferably used for low pressure ranges. Through the large working surface of the circular, corrugated diaphragm element, small pressure ranges can be measured reliably.

The diaphragm pressure gauges are manufactured in accordance with EN 837-3. The high-quality design is particularly suitable for applications in the chemical and petrochemical industry, oil and gas industry and power engineering. The case and wetted parts from stainless steel fulfil high requirements for resistance against aggressive media. For especially high resistance requirements, the pressure chamber can be designed with a wide variety of special materials such as PTFE, tantalum or Hastelloy.

For the measurement of highly viscous, crystallising or contaminated media, the use of an open connecting flange

is recommended. The open connecting flange has the advantage over a threaded connection that the pressure port cannot become blocked. With an additional flushing bore on the open connecting flange, the pressure chamber can be easily cleaned.

Measuring systems with diaphragm elements, on the grounds of their design, offer good protection from overload, since the diaphragm can support itself against the upper flange. As standard, this diaphragm pressure gauge already features an overload safety of 5 times the full scale value.

The QR code on the dial allows instrument-specific information such as the serial number, the order number, certificates and other product data to be retrieved from the internet easily and in the long term.



Diaphragm pressure gauge model 432.50


Configurator



Standard articles



## Functionality

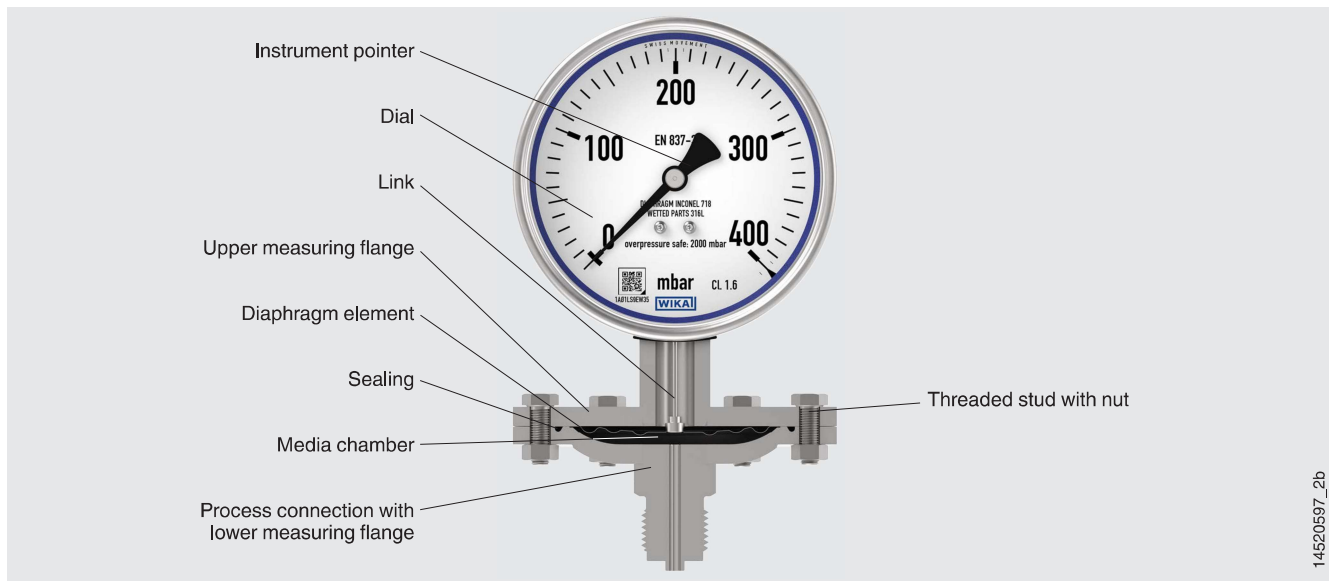

Diaphragm elements are circular, corrugated diaphragms. They are clamped together at the edge between two flanges and are subjected to the pressure on one side by the pressure in the media chamber. The resulting deflection is transmitted to the movement via the link and displayed on the dial with the instrument pointer.

### Overload safety

Diaphragm elements have a relatively large actuating force and, due to the annular clamping of the element, they are less sensitive to vibration in comparison with Bourdon tubes. Diaphragm elements can be subject to higher overload of up to 10 times the full scale value, up to a max. of 40 bar, through load take-up points (by bringing the diaphragm element up against the upper measuring flange). With a scale range of 0 ... 4 bar and 10-fold overload safety, a short-term overpressure of up to 40 bar is not problematic, as the accuracy is not affected.


### Versions for special media

Larger pressure ports, open connecting flanges and purging options can be integrated for measuring highly viscous, contaminated or crystallising media.

### Coating / Lining of wetted parts

By selecting a coating / lining for the wetted parts, the instrument can also be used for extremely corrosive media. The materials suitable for this can either be selected for the diaphragm element only, or together with the process connection with lower measuring connection in a freely combinable manner. The selection of the material combination determines whether it is self-sealing or implemented with a sealing.

→ Available materials (wetted) see page 3

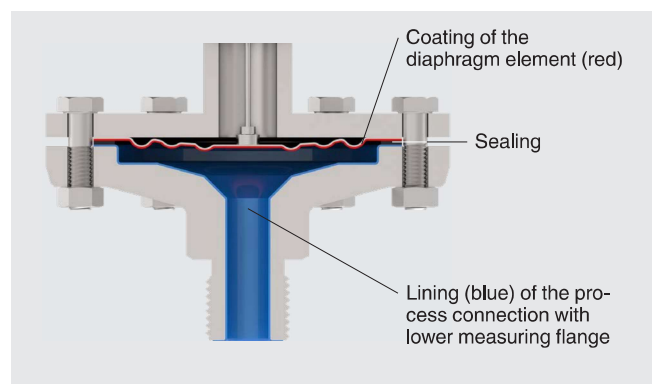

# Specifications

Basic information	
<b>Standard</b>	
Diaphragm and capsule pressure gauges	EN 837-3
→ For information on the “Selection, installation, handling and operation of pressure gauges”, see technical information IN 00.05.	
<b>Nominal size (NS)</b>	<ul style="list-style-type: none"> <li>■ Ø 100 mm [4"]</li> <li>■ Ø 160 mm [6"]</li> </ul>
<b>Window</b>	<ul style="list-style-type: none"> <li>■ Laminated safety glass</li> <li>■ Polycarbonate</li> </ul>
<b>Case</b>	
Design, models 432.50 and 433.50	Safety level “S1” per EN 837-1: With blow-out device
Design, models 432.30 and 433.30	Safety level “S3” per EN 837-1: With solid baffle wall and blow-out back
Material	<ul style="list-style-type: none"> <li>■ Stainless steel 1.4301 (304)</li> <li>■ Stainless steel 1.4571 (316 Ti)</li> </ul>
<b>Case filling</b>	<ul style="list-style-type: none"> <li>■ Without</li> <li>■ Glycerine-water mixture <sup>1)</sup></li> <li>■ Silicone oil M50 <sup>1)</sup></li> </ul> Instruments with case filling with compensating valve to vent case.
<b>Movement</b>	Stainless steel

1) Ingress protection IP65 for instruments with case filling

Measuring element		
Type of measuring element	Diaphragm element	
Materials (wetted)		
Diaphragm element <sup>1)</sup>	Span ≤ 0.25 bar	Stainless steel 316L
	Span ≥ 0.4 bar	NiCr alloy (Inconel)
Process connection with lower measuring flange	Stainless steel 316L	
Coating / Lining <sup>2) 3)</sup>	<div><div></div> Without</div> <div><div></div> PTFE (model 45x.50 or 45x.30)</div> <div><div></div> Hastelloy</div> <div><div></div> Monel</div> <div><div></div> Tantalum</div> <div><div></div> Gold (only for diaphragm element)</div>	
	Other materials on request	
Sealing <sup>4)</sup>	<div><div></div> FPM/FKM</div> <div><div></div> PTFE</div>	

1) The version for customer-specific spans which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] is defined after an application-specific test.

2) Diaphragm elements and process connections with lower measuring flanges can be coated / lined with various materials.  
→ See page 2

3) Accuracy class 2.5 with selection of a coating / lining.

4) The selection of the material combination determines whether it is self-sealing or implemented with a sealing.

Accuracy specifications	
<b>Accuracy class</b>	<ul style="list-style-type: none"> <li>■ 1.6 <sup>1)</sup></li> <li>■ 2.5 <sup>2)</sup></li> </ul>
<b>Temperature error</b>	On deviation from the reference conditions at the measuring system: ≤ ±0.8 % per 10 °C [≤ ±0.8 % per 18 °F] of full scale value
<b>Reference conditions</b>	
Ambient temperature	+20 °C [68 °F]

1) After feasibility test, if necessary, accuracy class 1.0 is possible.

2) Accuracy class 2.5 with selection of a coating / lining.

## Scale ranges

Scale range	Overload safety <sup>1)</sup>	Vacuum-resistant to -1 bar
<b>mbar</b>		
0 ... 16	■ 80 ■ 160	Selectable
0 ... 25	■ 125 ■ 250	Selectable
0 ... 40	■ 200 ■ 400	Selectable
0 ... 60	■ 300 ■ 600	Selectable
0 ... 100	■ 500 ■ 1,000	Selectable
0 ... 160	■ 800 ■ 1,600	Selectable
0 ... 250	■ 1,250 ■ 2,500	Selectable
0 ... 400	■ 2,000 ■ 4,000	Selectable
0 ... 600	■ 3,000 ■ 6,000	Selectable
0 ... 1,000	■ 5,000 ■ 10,000	Selectable
<b>bar</b>		
0 ... 0.6	■ 3 ■ 6	Selectable
0 ... 1	■ 5 ■ 10	Selectable
0 ... 1.6	■ 8 ■ 16	Selectable
0 ... 2.5	■ 12.5 ■ 25	Selectable
0 ... 4	■ 20 ■ 40	Yes
0 ... 6	■ 30 ■ 40	Yes
0 ... 10	40	Yes
0 ... 16	40	Yes
0 ... 25	40	Yes

## Vacuum scale ranges <sup>2)</sup>

Scale range	
<b>mbar</b>	
-16 ... 0	-250 ... 0
-40 ... 0	-400 ... 0
-60 ... 0	-600 ... 0
-100 ... 0	-1,000 ... 0
-160 ... 0	-
<b>bar</b>	<b>psi</b>
-0.6 ... 0	-15 inHg ... 0
-1 ... 0	-30 inHg ... 0

Scale range	Overload safety <sup>1)</sup>	Vacuum-resistant to -1 bar
<b>psi</b>		
0 ... 10	■ 50 ■ 100	Selectable
0 ... 15	■ 75 ■ 150	Selectable
0 ... 30	■ 150 ■ 300	Selectable
0 ... 60	■ 300 ■ 600	Yes
0 ... 100	■ 500 ■ 1,000	Yes
0 ... 160	■ 800 ■ 1,600	Yes
0 ... 200	■ 1,000 ■ 2,000	Yes
0 ... 300	■ 1,500 ■ 3,000	Yes
0 ... 400	■ 2,000 ■ 4,000	Yes

## Compound scale ranges <sup>2)</sup>

Scale range	
<b>mbar</b>	<b>bar</b>
-5 ... +20	-1 ... +0.6
-6 ... +10	-1 ... +1
-10 ... +15	-1 ... +1.5
-15 ... +25	-1 ... +2
-20 ... +40	-1 ... +3
-30 ... +30	-1 ... +5
-40 ... +60	-1 ... +9
-50 ... +200	-1 ... +10
-60 ... +100	-1 ... +15
-100 ... +150	-1 ... +24
-125 ... +125	<b>psi</b>
-150 ... +250	-30 inHg ... +15
-250 ... +750	-30 inHg ... +60
-400 ... +600	-30 inHg ... +100
-500 ... +500	-30 inHg ... +160
-600 ... +400	-30 inHg ... +200
-750 ... +250	-30 inHg ... +300
-800 ... +200	-

1) The specified values for overload safety and vacuum resistance are only valid for versions without coating / lining.

2) Specifications for overload safety and vacuum resistance on request.

→ Other scale ranges on request

Further details on: scale ranges		
Unit	<div><div></div> bar</div> <div><div></div> psi</div> <div><div></div> mbar</div> <div><div></div> kg/cm<sup>2</sup></div> <div><div></div> MPa</div> <div><div></div> kPa</div>	
	Other units on request	
Overload safety	<div><div></div> 5 x full scale value, max. 40 bar</div> <div><div></div> 10 x full scale value, max. 40 bar</div>	
Vacuum resistance	<div><div></div> Without</div> <div><div></div> Vacuum-resistant to -1 bar</div>	
Dial		
Scale layout	<div><div></div> Single scale</div> <div><div></div> Dual scale</div>	
Scale colour	Single scale	Black
	Dual scale	Black/red
Material	Aluminium	
Customer-specific version	Other scales, e.g. with red mark, circular arcs or circular sectors, on request → Alternatively, adhesive label set for red and green circular arcs, see data sheet AC 08.03	
Instrument pointer	Aluminium, black	

Process connection		
Standard	<div><div></div> EN 837</div> <div><div></div> ANSI / ASME B1.20.1</div> <div><div></div> ASME B16.5</div> <div><div></div> EN 1092-1, form B</div>	
Size <sup>1)</sup>		
EN 837	<div><div></div> G ½ B</div> <div><div></div> M20 x 1.5</div>	
ANSI / ASME B1.20.1	<div><div></div> ½ NPT</div>	
ASME B16.5	<div><div></div> Open connecting flange 1" class 150, RF</div> <div><div></div> Open connecting flange 2" class 150, RF</div> <div><div></div> Open connecting flange 1" class 300, RF</div>	
EN 1092-1, form B	<div><div></div> Open connecting flange DN 25 PN 40</div> <div><div></div> Open connecting flange DN 50 PN 40</div>	
Materials (wetted)		
Diaphragm element <sup>2)</sup>	Span ≤ 0.25 bar	Stainless steel 316L
	Span ≥ 0.4 bar	NiCr alloy (Inconel)
Process connection with lower measuring flange	Stainless steel 316L	
Coating / Lining <sup>3) 4)</sup>	<div><div></div> Without</div> <div><div></div> PTFE (model 45x.50 or 45x.30)</div> <div><div></div> Hastelloy</div> <div><div></div> Monel</div> <div><div></div> Tantalum</div> <div><div></div> Gold (only for diaphragm element)</div>	
	Other materials on request	
Sealing <sup>5)</sup>	<div><div></div> FPM/FKM</div> <div><div></div> PTFE</div>	

1) Further threaded connections and open connecting flanges per ASME B16.5 / EN 1092-1 form B from DN 15 to DN 80, see technical information IN 00.10.

2) The version for customer-specific spans which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] is defined after an application-specific test.

3) Diaphragm elements and process connections with lower measuring flanges can be coated / lined with various materials, see page 2.

4) Accuracy class 2.5 with selection of a coating / lining.

5) The selection of the material combination determines whether it is self-sealing or implemented with a sealing.

→ Other process connections on request

Operating conditions	
Medium temperature range	<ul style="list-style-type: none"> <li>■ +100 °C [+212 °F] maximum</li> <li>■ +200 °C [+392 °F] maximum</li> </ul>
Ambient temperature range	<ul style="list-style-type: none"> <li>■ -20 ... +60 °C [-4 ... +140 °F]</li> <li>■ -40 ... +60 °C [-40 ... +140 °F] <sup>1)</sup></li> </ul>
Storage temperature range	-40 ... +70 °C [-40 ... 158 °F]
Pressure limitation	
Steady	Full scale value
Fluctuating	0.9 x full scale value
Ingress protection per IEC/EN 60529	<ul style="list-style-type: none"> <li>■ IP54</li> <li>■ IP65 <sup>2)</sup></li> <li>■ IP66 <sup>3)</sup> (ingress protection of the case)</li> </ul>

1) Only selectable in combination with silicone oil case filling

2) Ingress protection IP65 for instruments with case filling

3) Hermetically sealed case; see data sheet IN 00.18







## Other versions

- Version for hazardous areas (Ex h)
- Diaphragm pressure gauge with switch contacts, models PGS43.100, PGS43.160; see data sheet PV 24.03
- Diaphragm pressure gauge with output signal, models PGT43.100, PGT43.160; see data sheet PV 14.03
- Diaphragm pressure gauge, high overload safety, models 432.x6, PGx43HP; see data sheets PM 04.07, PV 24.07 and PV 14.07
- Oil- and grease-free
- Oil- and grease-free for oxygen
- Silicone-free
- Per NACE <sup>1)</sup> MR0175 / ISO 15156, use in H<sub>2</sub>S-containing environments in oil and gas production
- Per NACE <sup>1)</sup> MR0103 / ISO 17945, metals resistant to sulphide stress cracking
- With pre-volume deflagration flame arrester <sup>2)</sup> for connection to zone 0 (EPL Ga); model 910.21; see data sheet AC 91.02
- With flushing bore on the open connecting flange

1) General information about NACE standards, see data sheet IN 00.21

2) Only for instruments with Ex approval

## Optional approvals

Logo	Description	Region
 	<b>EU declaration of conformity</b> ATEX directive <sup>1)</sup> Hazardous areas Gas II 2G h IIC T6 ... T1 Gb X Dust II 2D h IIIC T85°C ... T450°C Db X	European Union
	<b>EAC</b> Hazardous areas <sup>1)</sup>	Eurasian Economic Community
	<b>Ex Ukraine</b> Hazardous areas <sup>1)</sup>	Ukraine
	<b>PAC Kazakhstan</b> Metrology, measurement technology	Kazakhstan
-	<b>MChS</b> Permission for commissioning	Kazakhstan
-	<b>PAC Ukraine</b> Metrology, measurement technology	Ukraine
	<b>PAC Uzbekistan</b> Metrology, measurement technology	Uzbekistan
-	<b>PAC China</b> Metrology, measurement technology	China
-	<b>CRN</b> Safety (e.g. electr. safety, overpressure, ...)	Canada

<sup>1)</sup> In the area of the coating / lining from PTFE, measures must be taken, if necessary, in order to exclude electrostatic charging.

## Certificates (option)

Certificates	
<b>Certificates</b>	<ul style="list-style-type: none"> <li>■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy)</li> <li>■ 3.1 inspection certificate per EN 10204 (e.g. material proof for wetted metal parts, indication accuracy)</li> </ul>
<b>Recommended calibration interval</b>	1 year (dependent on conditions of use)

## Patents, property rights


Patent number	Description
US Design D1051747S, CPC CN 01677074, DE Design 402022100171, EU Design 402022100171, IR Design DM/222416, EU 3D trademark 018659564	Design patent WIKA blue identity

The WIKA blue identity design is protected in various countries under various rights.

→ For approvals and certificates, see website

## Dimensions in mm [in]

### Models 432.50 and 433.50

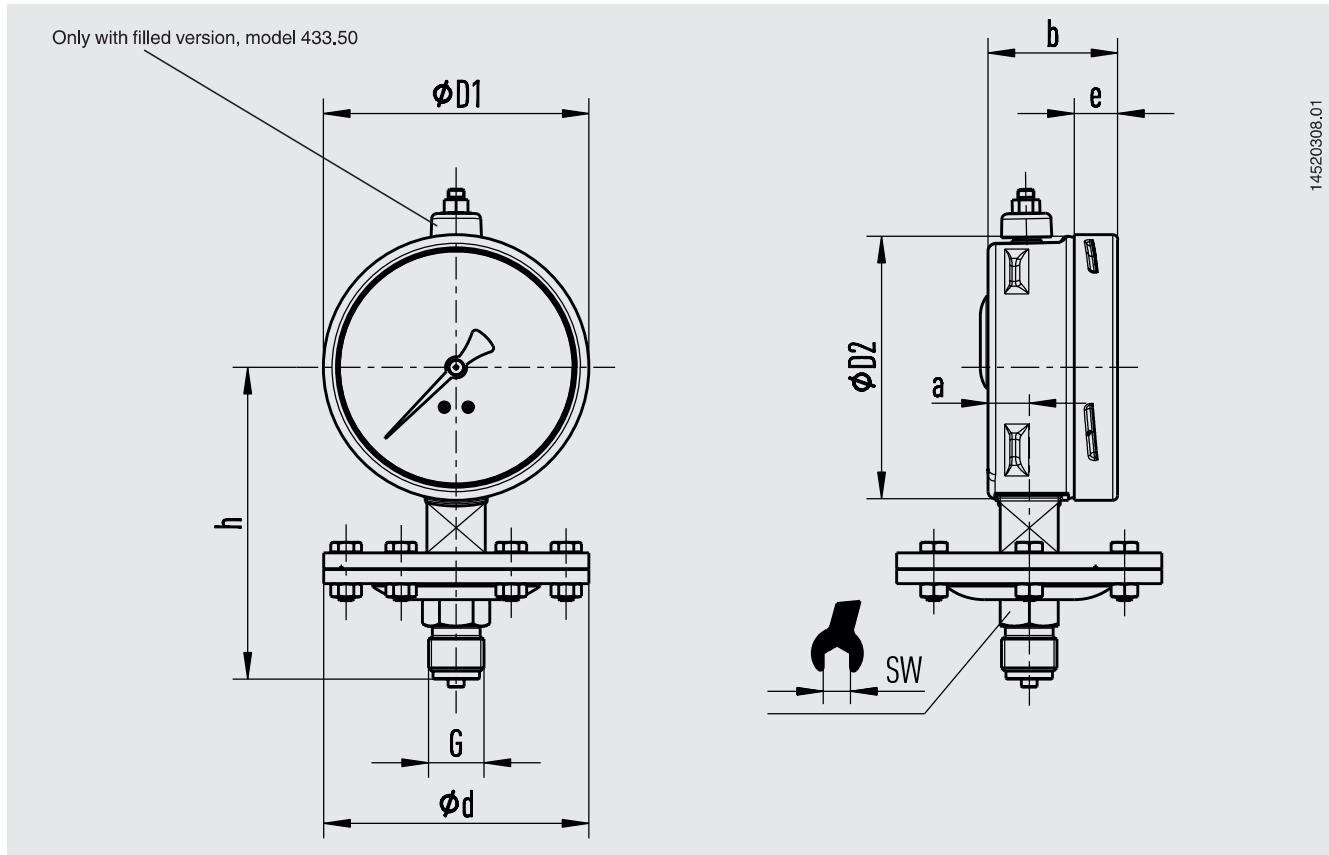

#### Nominal size 100 [4"]

Process connection G	Span <sup>1)</sup>	Dimensions in mm [in]								Weight in kg [lb]
		d	a	b	e	D1	D2	h ± 2 [0.08]	SW	
<b>G ½ B</b>	≤ 0.25 bar [3.6 psi]	160 [6.3]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	101 [3.98]	99 [3.90]	119 [4.69]	22 [0.87]	2.5 [5.5]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	101 [3.98]	99 [3.90]	117 [4.61]	22 [0.87]	1.3 [2.9]
<b>½ NPT</b>	≤ 0.25 bar [3.63 psi]	160 [6.3]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	101 [3.98]	99 [3.90]	118 [4.65]	22 [0.87]	2.5 [5.5]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	101 [3.98]	99 [3.90]	116 [4.57]	22 [0.87]	1.3 [2.9]

#### Nominal size 160 [6"]


Process connection G	Span <sup>1)</sup>	Dimensions in mm [in]								Weight in kg [lb]
		d	a	b	e	D1	D2	h ± 2 [0.08]	SW	
<b>G ½ B</b>	≤ 0.25 bar [3.6 psi]	160 [6.3]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	161 [6.34]	159 [6.26]	149 [5.87]	22 [0.87]	2.9 [6.4]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	161 [6.34]	159 [6.26]	147 [5.79]	22 [0.87]	1.7 [3.7]
<b>½ NPT</b>	≤ 0.25 bar [3.63 psi]	160 [6.3]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	161 [6.34]	159 [6.26]	148 [5.83]	22 [0.87]	2.9 [6.4]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	15.5 [0.61]	49.5 [1.95]	17.5 [0.69]	161 [6.34]	159 [6.26]	146 [5.75]	22 [0.87]	1.7 [3.7]

1) The dimensions of customer-specific spans which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] are defined after an application-specific test.



## Models 432.30 and 433.30

Only with filled version, model 433.30

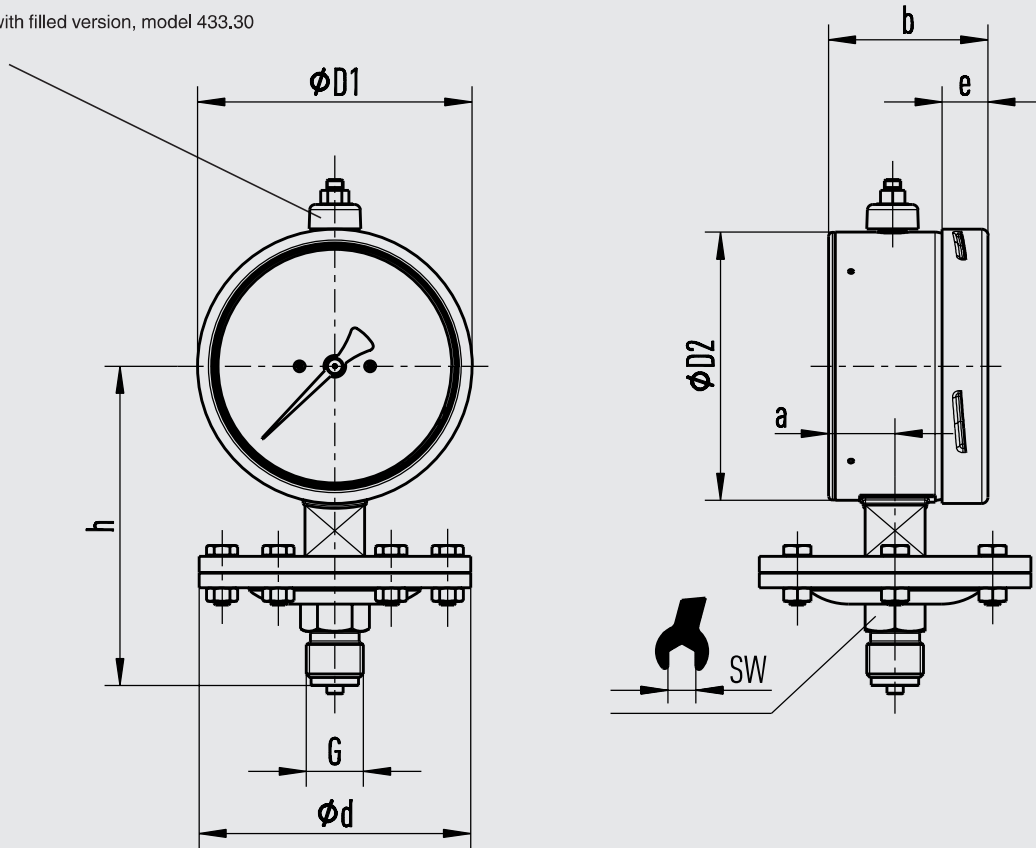

14520311.01

### Nominal size 100 [4"]






Process connection G	Span <sup>1)</sup>	Dimensions in mm [in]								Weight in kg [lb]
		d	a	b	e	D1	D2	h ± 2 [0.08]	SW	
<b>G ½ B</b>	≤ 0.25 bar [3.6 psi]	160 [6.3]	24.5 [0.96]	59 [2.32]	17.5 [0.69]	101 [3.98]	99 [3.90]	119 [4.69]	22 [0.87]	2.5 [5.5]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	24.5 [0.96]	59 [2.32]	17.5 [0.69]	101 [3.98]	99 [3.90]	117 [4.61]	22 [0.87]	1.3 [2.9]
<b>½ NPT</b>	≤ 0.25 bar [3.63 psi]	160 [6.3]	24.5 [0.96]	59 [2.32]	17.5 [0.69]	101 [3.98]	99 [3.90]	118 [4.65]	22 [0.87]	2.5 [5.5]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	24.5 [0.96]	59 [2.32]	17.5 [0.69]	101 [3.98]	99 [3.90]	116 [4.57]	22 [0.87]	1.3 [2.9]

### Nominal size 160 [6"]

Process connection G	Span <sup>1)</sup>	Dimensions in mm [in]								Weight in kg [lb]
		d	a	b	e	D1	D2	h ± 2 [0.08]	SW	
<b>G ½ B</b>	≤ 0.25 bar [3.6 psi]	160 [6.3]	27 [1.06]	65 [2.56]	17.5 [0.69]	161 [6.34]	159 [6.26]	149 [5.87]	22 [0.87]	2.9 [6.4]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	27 [1.06]	65 [2.56]	17.5 [0.69]	161 [6.34]	159 [6.26]	147 [5.79]	22 [0.87]	1.7 [3.7]
<b>½ NPT</b>	≤ 0.25 bar [3.63 psi]	160 [6.3]	27 [1.06]	65 [2.56]	17.5 [0.69]	161 [6.34]	159 [6.26]	148 [5.83]	22 [0.87]	2.9 [6.4]
	≥ 0.4 bar [5.8 psi]	100 [3.94]	27 [1.06]	65 [2.56]	17.5 [0.69]	161 [6.34]	159 [6.26]	146 [5.75]	22 [0.87]	1.7 [3.7]

1) The dimensions of customer-specific spans which are between 0.25 bar [3.6 psi] and 0.4 bar [5.8 psi] are defined after an application-specific test.

## Accessories and spare parts

Model		Description	Order number
	<b>910.33</b>	Adhesive label set for red and green circular arcs → See data sheet AC 08.03	-
		NS 100 [4"]	14238945
		NS 160 [6"]	14228352
	<b>910.17</b>	Sealings → See data sheet AC 09.08	On request
	<b>910.15</b>	Syphons → See data sheet AC 09.06	On request
	<b>910.13</b>	Overpressure protector → See data sheet AC 09.04	On request
	<b>IV2</b>	Block-and-bleed valve → See data sheet AC 09.19	On request
	<b>IBF2, IBF3</b>	Monoblock with flange connection → See data sheet AC 09.25	On request
	<b>910.16</b>	Mounting parts for wall and pipe mounting Instrument mounting bracket and adapter piece → See data sheet AC 09.07	On request

### Ordering information

Model / Nominal size / Scale range / Process connection /  
Connection location / Options

© 10/2008 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.  
The specifications given in this document represent the state of engineering at the time of publishing.  
We reserve the right to make modifications to the specifications and materials.  
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.

